


Repartidores 2D, 4D, 5D, 6D, 8D F / Repartidores 2D, 4D, 5D, 6D, 8D F / Répartiteur 2D, 4D, 5D, 6D, 8D F / 2W, 4W, 5W, 6W, 8W Splitter F / 2, 4, 5, 6, 8 -fach SAT-Verteiler 5-2400MHz-DC-Pass in beiden Richtungen

Ref. 5155, 5156, 5157, 5158, 5159

Art. Nr. SDCV25FN, SDCV49FN, SDCV512FN, SDCV16F, SDCV19F

5155
SDCV25FN



5156
SDCV49FN




5157
SDCV512FN



5158
SDCV616F



5159
SDCV819F

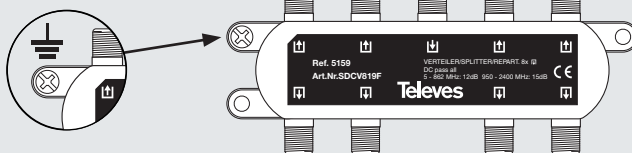


GAMA DE PRODUCTOS / GAMA DE PRODUTOS / GAMME DE PRODUITS / PRODUCT RANGE / PRODUKTPALETTE

Ref	Art. Nr.	Descripción / Description	Tipo / Type	
5155	SDCV25FN	2W Taps F (4/5 dB) - DC All	2 Out	SKY compatible Attic Box compatible
5156	SDCV49FN	4W Taps F (8/10 dB) - DC All	4 Out	
5157	SDCV512FN	5W Taps F (10/12 dB) - DC All	5 Out	
5158	SDCV616F	6W Taps F (11/14 dB) - DC All	6 Out	
5159	SDCV819F	8W Taps F (12/15 dB) - DC All	8 Out	

Caract. tech.	Especif. técn.	Tech. Daten	Especif. técn.	Tech. especific.		5155 SDCV25FN	5156 SDCV49FN	5157 SDCV512FN	5158 SDCV516F	5159 SDCV819F
Marge fréq.	Margen freq.	Frequenzbereich	Margen freq.	Freq. range	MHz	5 - 2400				
Type	Tipo	Typ	Tipo	Type		2 S/W/ fach	4 S/W/ fach	5 S/W/ fach	6 S/W/ fach	8 S/W/ fach
Pertes insertion	Pérdidas inserción	Verteil-dämpfung	Pérdidas inserción	Insertion loss	MATV	4	8	10	11	12
					IF	5	10	12	14	15
Réjéct sorties	Rech. entre salidas	Entkopplung Ausgänge	Rech. entre salidas	Rejection between outputs	MATV	> 20	> 20	> 20	> 20	> 20
					IF	> 20	> 20	> 20	> 20	> 20
Courant max.	Corriente máx.	Max. Strom	Corriente máx.	Max. current	A	1				

Aplicación Aplicação Application Application Anwendung

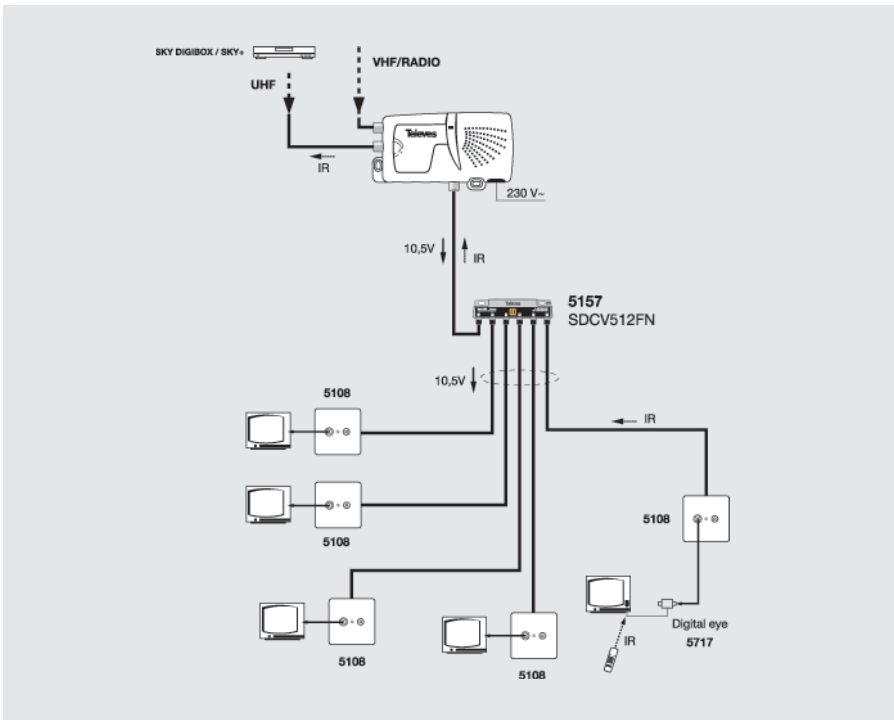

DECLARACIÓN DE CONFORMIDAD ■ DECLARATION OF CONFORMITY ■ DECLARAÇÃO DE CONFORMIDADE ■ DECLARATION OF CONFORMITE ■ DICHIARAZIONE DI CONFORMITÀ ■ DEKLARACJA ZGODNOŚCI ■ KONFORMITÄT SERKLÄRUNG ■ ΠΙΣΤΟΠΟΙΗΤΙΚΟ ΣΥΜΜΟΡΦΩΣΗΣ ■ FÖRSÄKRAN OM ÖVERENSSTÄMMELSE ■ DEKLARACIJA SOOTVETSTVIYA ■ 符合聲明

► <https://doc.televes.com>

