


Passives Splitters

- Connector, F type
- Die-cast housing
- All port power pass, max – 1A
- 5-2400MHz
- Indoor

5 – 2400 MHz

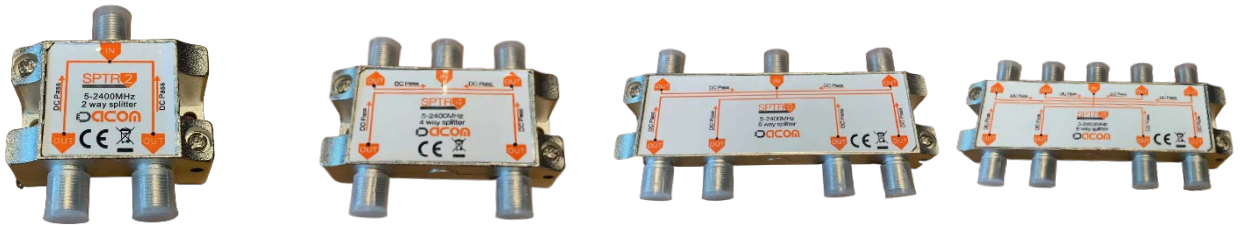

Technical specification	SPTR2 2 way splitter				SPTR4 4 way splitter				SPTR6 6 way splitter				SPTR8 8 way splitter			
Frequency range (MHz)	5-40	40-1000	1000-2050	2050-2400	5-40	40-1000	1000-2050	2050-2400	5-40	40-1000	1000-2050	2050-2400	5-40	40-1000	1000-2050	2050-2400
Insertion loss (dB) IN - OUT	4.0	4.5	5.8	4.0	8.0	8.5	11.0	8.0	11.0	11.5	14.0	11.0	12.0	12.5	16.0	12.0
Isolation (dB) OUT - OUT	14.0	22.0	22.0	22.0	23.0	22.0	22	22.0	24.0	22.0	22.0	20.0	25.0	24.0	22.0	22.0
Return loss (dB)	12.0	15.0	14.0	12.0	10.0	12.0	12.0	12.0	10.0	14.0	12.0	12.0	10.0	12.0	12.0	12.0

